



NEW *SUREFIRE* 1.5

Tri Tool's Most Convenient Cordless Pipe Beveler

Convenient, Cordless Power

Tri Tool's **new Surefire 1.5** pipe beveler gives you the freedom to work in the field and in-situ without compromising performance or precision. This lightweight, battery-powered machine features small diameter cutting heads which allow for rapid, accurate machining in tight spaces, making it perfect for boiler use in water-wall cutout windows and between boiler panels. Stiffening plates maximize rigidity to ensure smooth, accurate cuts, even on heavy wall pipe.



Portable

Lightweight, battery-powered for efficiency in the shop or in-the-field



Reliable

Achieve precise and consistent bevels for higher productivity



Versatile

Quickly, accurately bevels pipe of various sizes and materials

New Surefire 1.5 - A Robust and Reliable Cordless Pipe Beveler

- Stiffener plates provide rigidity for heavier wall and J-prep bevels
- Adjustable, full-range saddle included 0.250"-2.000" [6.4mm-50.8mm]
- 1.45" and 2.00" cutting heads included
- Brushless motor powers through heavy cuts in a compact form-factor
- Battery-powered operation for complete portability, no wires or hoses
- OD Mount Machine
- Pneumatic motor options available
- Cordless motor is maintenance free



Bevels and faces mild, chrome and stainless steels, as well as copper-nickel alloys & aluminum

Save time and boost productivity with the new Surefire 1.5!


For orders and more information, contact our precision machining specialists at **+1-916-288-6100**, email **info@tritool.com**, and chat with us at **tritool.com**

©2025 Specifications are subject to change.

Surefire 1.5 Comes Complete With:

- 1.45" (36.8mm) and 2.00" (50.8mm) DIA Head Kit
- Adjustable Saddle Kit, Full Range
DIA Range = 0.250" (6.4mm) to 2.000" (50.8mm)
- Wrench Kit
- Carrying Case
- Operator's Manual

Dimensions:

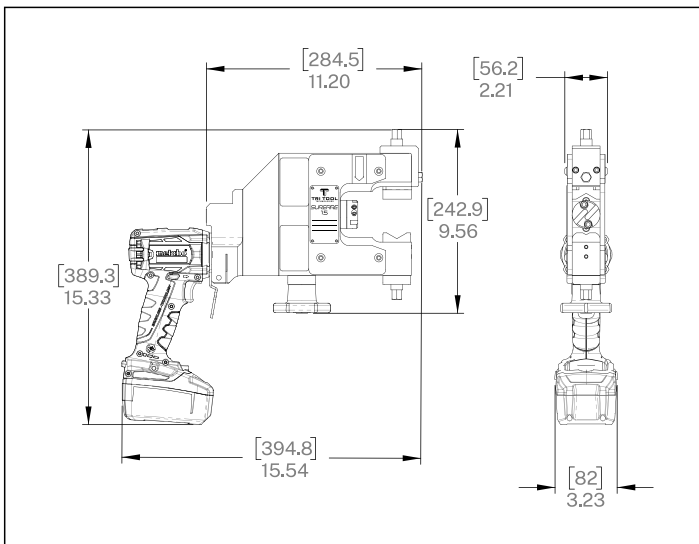

Weight:

- 17.2 lbs (7.8kg)

Cut Capacity:

- 1/8" through 1 1/2" pipe
- 0.25" through 2.00" [6.4mm - 50.8mm] tube
- Wall thickness up to 0.400" [10.2mm]

Material Capabilities:

- Mild, chrome and stainless steels, copper nickel alloys and aluminum.
- Inconel and some other high temp alloys with some limitations/special procedures*.

Feed:

- 0.75" (19.1mm) feed travel
- Manual feed knob is right angle near the back of the machine
- Feed rate is 0.036" (0.9mm) per revolution of the knob

Cutting Head Speeds:

- Variable Trigger Speed Control
- Range: 47-220 RPM
- @ Max HP: 112 RPM

Battery:

- 2x Metabo Li-Power Batteries (18V, 5.2Ah)

Charger Power:

- 115V, 230V (Type C or G), 100V

*Contact Tri Tool for air motor specifications.

Save time and boost productivity with the new Surefire 1.5!

For orders and more information, contact our precision machining specialists at **+1-916-288-6100**, email **info@tritool.com**, and chat with us at **tritool.com**

©2025 Specifications are subject to change.